

FRAC TANK - "V" BOTTOM



STANDARD FEATURES

- FLANGE MOUNT BLAYLOCK LL 10 P/V VENT
16OZ PRESSURE, 0.4OZ VAC SETTINGS
- 2" COUPLING WITH PLUG
- 4" FLANGE WITH BLIND COVER
- 21" MANWAY DOMED LID AND BARS
- 3" ELBOW FILL LINE WITH CAP
- SAFETY WALK WAY (36" GRATING)
- ACCESS STAIRS
- LEVEL GAUGE WITH 8" STAINLESS STEEL BALL "Y"
SUPPORT HOLD BALL 1" MINIMUM OFF FLOOR
- FRONT DRAIN WITH VALVE, THREADED FLANGE,
PLUG, CHAIN
- 21" MANWAY, DOMED LID (2)
- 11.00 X 22/5 TUBELESS TIRE ON 10 HOLD
STEEL WHEEL
- FOLDING HAND RAILS
- 4" FLANGE VALVE, THREADED FLANGE,
PLUG, CHAIN REMOTE OPERATION
HANDLE
- 25K AXLE, AUTOMATIC SLACK ADJUSTERS,
TOP MOUNTED 30 SERVICE CHAMBERS,
OUTBOARD DRUMS, HUTCH 9700
SUSPENSION, 3 LEAF HIGH ARCH
SPRINGS
- DOT TAIL LIGHTS AND LOWER MARKET
LIGHTS, NO TOP LIGHTS
- 4" COUPLING WITH PLUG

ADD-ONS


- 12 X 50 BERM
- LIQUID LEVEL GAUGE
- HOSE BRIDGE



NATIONAL
TANK & EQUIPMENT

FOR MORE INFO : NTERENTS.COM | 888.213.7950

FRAC TANK - "V" BOTTOM

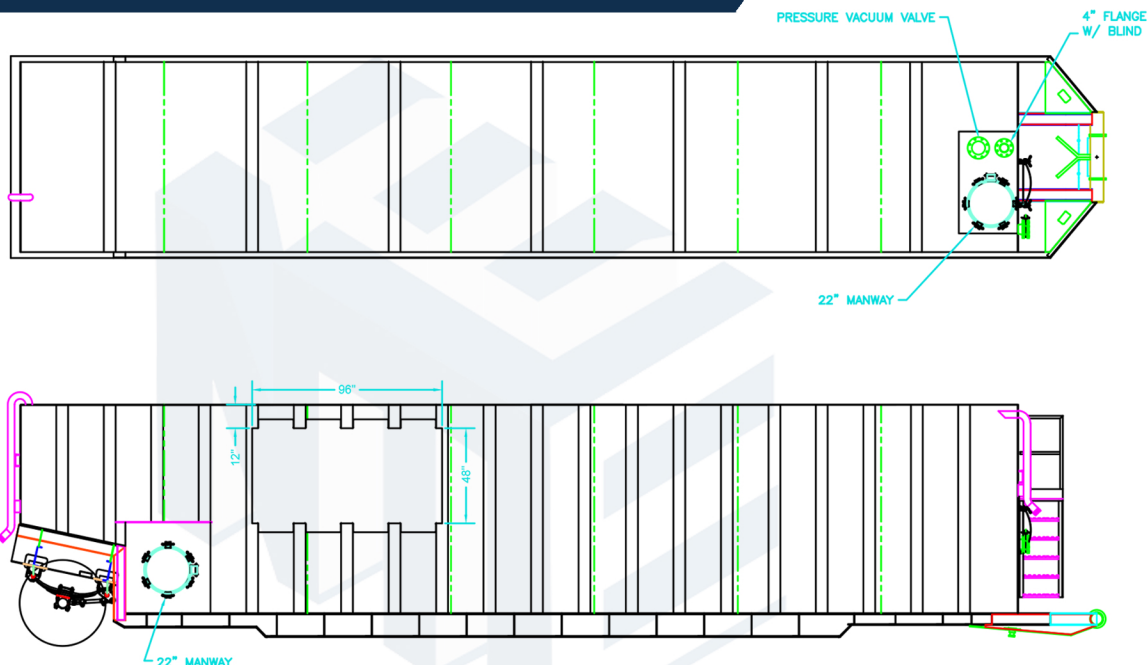

SPECIFICATIONS

- **FLOOR:** 1/4" PL, V-BOTTOM W/ INTEGRAL FORMED SIDE CHANNELS
- **FLOOR SUPPORT:** 10" CHANNEL LONGITUDINAL RUNNERS W/ 8" CHANNEL & FORMED 1/4 PL CHANNEL CROSSMEMBERS
- **WALLS:** AVAILABLE IN SMOOTH OR CORRUGATED
- **ROOF:** 2-STEP DESIGN, 1/4" PL SOLID WELDED W/ CHANNEL SUPPORTS OUTSIDE
- **DRAIN/FILL:** 4" DRAIN AT FLOOR EACH END, 3" FILL PIPE TO ROOF AT FRONT, 4" CONNECTION ON FRONT, 8" FLANGED FRONT MANIFOLD CONNECTION W/ INSIDE FLANGE, 4" CONNECTION ON ROOF
- **MANWAY:** 21" MANWAY ON FRONT, SIDE AND (2) ON ROOF
- **PICK UP:** STANDARD 5TH WHEEL KING PIN
- **WELDS:** ALL WELDS CONTINUOUS EXCEPT SUBSTRUCTURE CROSSMEMBERS
- **AXLE:** 25,000LB AXLE W/ AIR BREAKS, 11.00 X 22.5 BIAS TIRES ON STEEL DISC WHEELS
- **HYDROTESTING:** FULL CAPACITY STATIC TEST
- **DIMENSIONS:** OVERALL 42' L, 8'-6" W, 11' H, 500 BBL CAPACITY
- **TANK PRESSURE/VACUUM RELIEF VENT**
- **LEVEL GAUGING**

